















## Mounting Brackets – Installation Procedure

<b>Wall Mount</b>	
Step	Action
1	<p>Attach the Body Bracket, PN1000265-001, to the standard hanging bracket using two M8x16 bolts, PN1000211, and two M8 Nuts, PN1000069.</p> <div style="display: flex; justify-content: space-around;">   </div>
2	<p>Attach the Wall Bracket, PN1000265-002, to the Body Bracket using two M8x25 bolts, PN1000212, and two M8 Nuts, PN1000069.</p> <div style="display: flex; justify-content: space-around;">   </div>
3	<p>Attach the assembly to the desired surface using two M12 bolts and nuts (or 7/16" - 1/2" bolts).</p> <p><i>Fasteners to attach to wall are not included.</i></p> <div style="display: flex; justify-content: space-around;">   </div>
4	<p>The angle of the fixture can be adjusted by loosening the M8 bolts and rotating the Body Bracket relative to the Wall Bracket.</p> <div style="text-align: center;">  </div>

3/4" NPT and Hook	
Step	Action
1	<p>The 3/4" NPT Hanging Bracket, PN1000222, must come installed on the unit. The 3/4" pipe with NPT and hook are not provided with the unit.</p> 
2	<p>Place one 3/4" Conduit Lock Nut on extension pipe with 3/4" NPT.</p> 
3	<p>Thread pipe into 3/4" NPT Hanging Bracket.</p> 
4	<p>Place two 3/4" Conduit Lock Nuts on underside of bracket to lock extension pipe in place.</p> 
5	<p>Hang unit according to standard good maintenance practices.</p> 

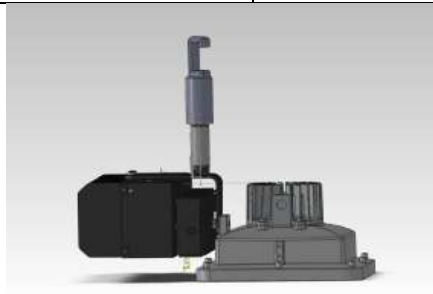

Truss Bracket	
Step	Action
1	<p>Attach the Truss Bracket, PN1000253, to the standard hanging bracket using one M8x20 bolt, PN1000277, one M8 Nut, PN1000279, one M12x20, PN1000278, and one M12 Nut, PN1000280.</p> 
2	<p>Hang unit over the truss by bracket.</p> 